

LMS26



COMPONENTS:

- 1 Rotating contact surface
- 2 Stationary contact surface
- 3a O-ring
- 4 Spring
- 5 Metal frame
- 6 Ring
- 7 Metal frame
- 8 Setting clips

SECTORS:



CHARACTERISTICS:

- Equilibrado.
- Sistema rotación independiente
- Multimuelle
- External mounting.

OPERATING LIMITS:

$p = 50 \text{ kg/cm}^2$ $v = 50 \text{ m/s}$


$t = -20 \div +140^\circ\text{C}$ (*)

(*) The temperature resistance depends on the material of the secondary seals used.

The operating limits are defined by the PV factor which is determined for the sealing system characteristics and those of the application.

DESCRIPTION:

Balanced mechanical seal with protected springs to prevent them from blocking when in contact with sticky or viscous fluids. The O-ring on the shaft is static, thereby preventing "fretting" of the shaft.

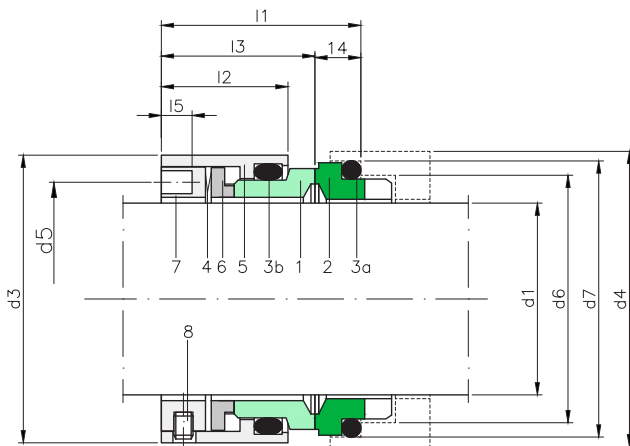

DIMENSIONS CHART

Dimensions in mm

mm	Shaft					Rotary part				
	d ₃	d ₄	d ₅	d ₆	d ₇	l ₁	l ₂	l ₃	l ₄	l ₅
40	65	64	52	53.5	59	48.5	30	39	9.5	5
50	75	77	61	63.5	72	54.5	33	42.2	12.3	5
53	80	80	64	66.5	75	55	33.5	42.7	12.3	5
55	85	85	68	71.5	80	60	36.5	47.2	12.8	5
60	90	90	74	76.5	85	61.5	38	48.7	12.8	5
65	95	95	78	81.5	90	62	38	49.2	12.8	5
80	115	119	98	102	110.5	63.5	38	50	13.5	5

Dimensions subject to changes or modifications.